

Ammonia NH₃ Chillers

A Zero-GWP Innovative product in refrigeration & air-conditioning

Δίντσιος Κων/νος

Engineering Energy Systems



ENGINEERING ENERGY SYSTEMS

Why it was developed a new Ammonia chiller?

**Use the potential of ammonia –
high volumetric efficiency**


**Minimize the „fear“ concerning ammonia –
be as hermetic as possible**

**Offer a solution for Freon substitution –
minimize size**

**Use the advantage of a highly standardized product –
short delivery & competitive price**

Follow EU directives

HFC Refrigerant consumption in Europe

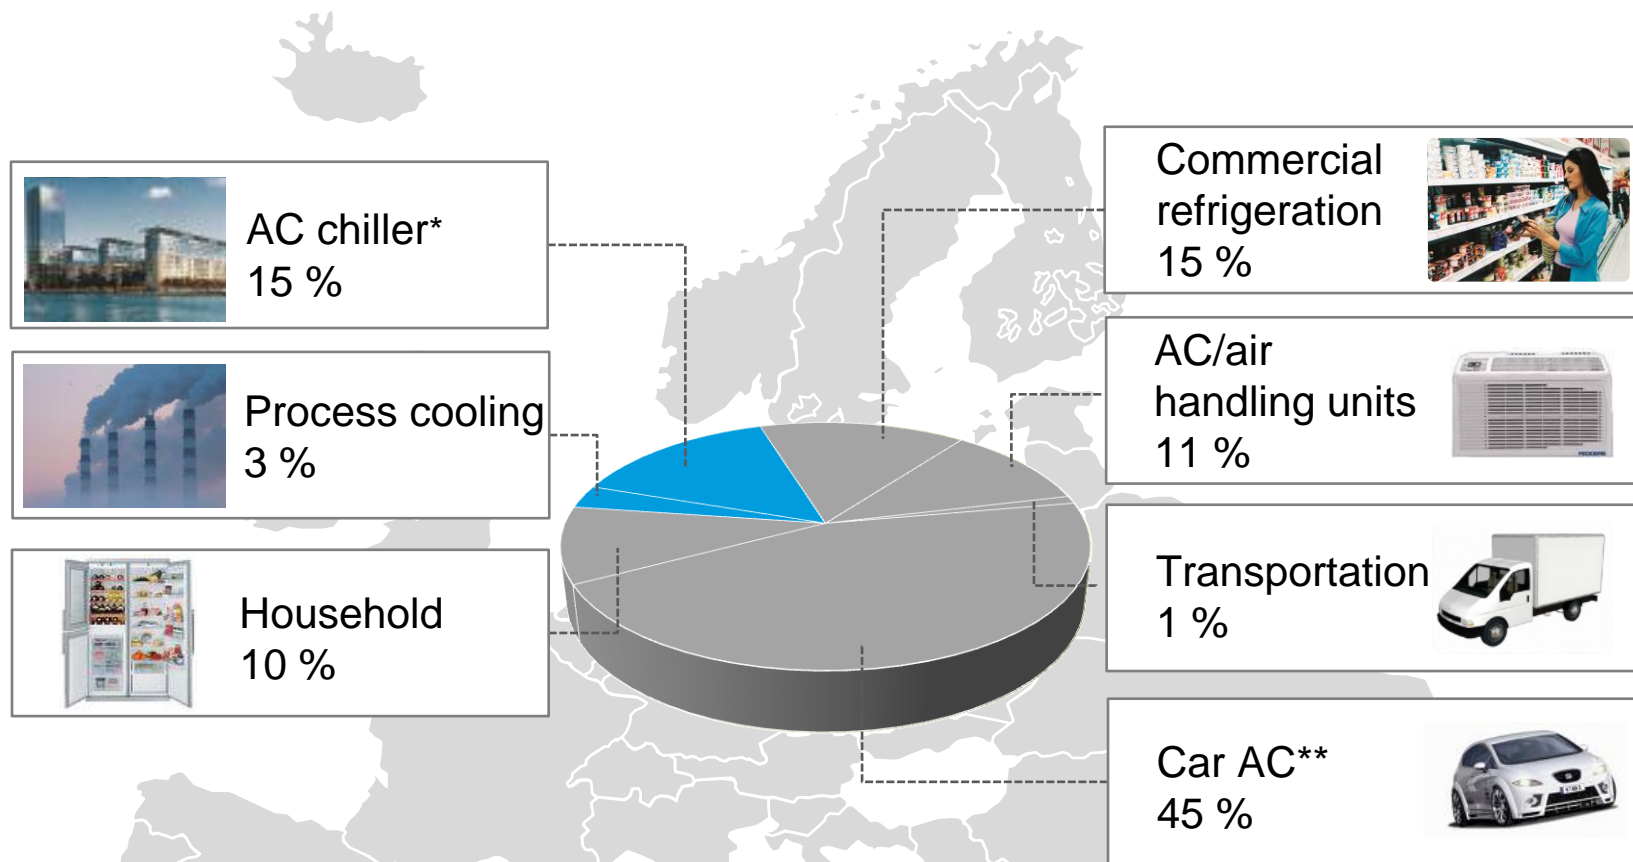

Ammonia Chillers market potential in AC chiller and process cooling

* AC chiller market size is approx. 40,000 units / 5% within the possible size range

** ban for R134A at new developed cars since 2011

World refrigerant market trends

Refrigerants

Synthetic

Natural

CFCs

R11

R12

R113

R500

R501

R502

....

1996

Sales ban

HCFCs

R21

R22

R123

R124

....

2000

Sales ban

HFCs

R134a

R135a

R152a

R125

....

2011/
2017

Partly*
sales ban

HFCs

R23

R507

R404A

R410A

R407C

2020/
Future

Sales ban

Ammonia
Hydrocarbon
Water
Carbon dioxide

General global trend towards natural refrigerants

* Air conditioning in cars in EU

New F-GAS Regulation



COUNCIL OF
THE EUROPEAN UNION

Brussels, 6 January 2014
(OR. eu)

SN 1036/1/14
REV 1

Interinstitutional File:
2012/0305 (COD)

LIMITE

NOTE

Subject: Proposal for a Regulation of the European Parliament and of the Council on fluorinated greenhouse gases

PE-CONS No/YY - 2012/0305 (COD)

Proposal for a REGULATION (EU) No. .../20YY
OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL

of ...

on fluorinated greenhouse gases and repealing Regulation (EC) No 842/2006

(Text with EEA relevance)

THE EUROPEAN PARLIAMENT AND THE COUNCIL OF THE EUROPEAN UNION,

Having regard to the Treaty on the Functioning of the European Union, and in particular Article 192(1) thereof,

SN 1036/1/14 REV 1

DG E I B

MS/ach

LIMITE

1

EN

Products & Equipment	Date of Prohibition
Domestic Refrigerators & Freezers that contain HFCs with GWP>150	01-Jan-15
Refrigerators & Freezers for commercial use (hermitically sealed systems) with GWP>2500	01-Jan-20
Refrigerators & Freezers for commercial use (hermitically sealed systems) with GWP>150	01-Jan-22
Centralized Refrigeration Systems for commercial use with capacity >40KW that contain HFCs with GWP>150, except cascade systems with GWP<1500	01-Jan-22
Single Split AC systems containing less than 3Kg of HFCs, that contain HFCs with GWP>750	01-Jan-25

Sustainability with Ammonia R717

“The refrigeration and air conditioning industries with their synthetic refrigerants negatively effect the environment all over the world.”

- **Natural refrigerants** are the obvious choice as a sustainable and ecological alternative to HFC's
- All natural refrigerants occur in nature's material cycle.
- They **do not contribute to the depletion of the ozone layer** and have no significant influence to the greenhouse effect.

Notifications

*R717 - NH₃: Lighter than Air,
Characteristic Smell,
Critical Handling Procedures*

*CO₂: High Ambient Low Cooling
Efficiency – High Pressure*

R290: Highly Flammable

Refrigerant	GWP - Global Warming Potential	Indicative Prices €/Kg
R717 - NH ₃	0	2
CO ₂	1	7
R290	3	20
R134a	1430	4.5
410A	2088	4.8
404A	3922	4.8
407C	1774	5
407F	1705	5

Trends in Europe and Australia regarding HFC

Australia

Penalty tax on HFC middle of 2012;
Geared to GWP

Greece

HFC - Carbon tax
possible from 2017

Spain

High HFC tax beginning 2014
Geared to GWP

Norway & Sweden

Penalty tax on HFC e.g., in Norway
(+272.00 NOK/kg R134a (~ 35 €))

Denmark

Larger than 10kg HFC charge

Germany

Subsidies of up to € 200,000 for
commercial refrigeration systems
using CO₂, NH₃ or hydrocarbons
Annual inspection with leak test for
HFC systems (1-4 times, depending
on filling quantity)

Luxembourg

Decision according to TEWI value

Austria

Larger than 20kg HFC charge

Switzerland

>300 kW Q_o

HFC

Ammonia Chiller design

High efficient screw compressor

Control unit


Electric motor
VSD driven

Condenser

Expansion control

Evaporator/liquid receiver

Enclosure
(optionally)

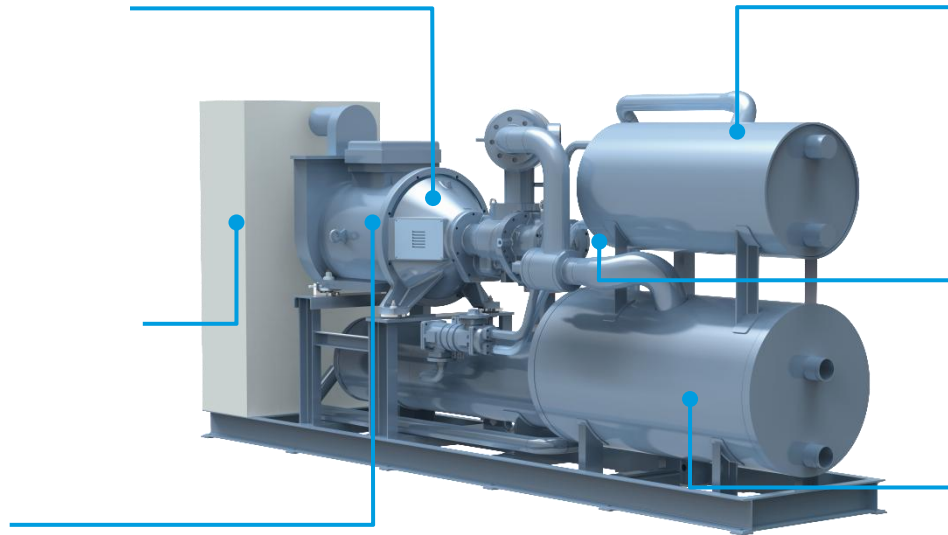

Ammonia Chiller Advantages

- Minimizing carbon footprint by using natural refrigerants
- Highest ESEER efficiency by applying newest technologies for all core components
- Small dimensions (door size and minimum footprint) – low required space
- Excellent low noise level and safety in design

**Optimized for low TCO (total cost of ownership) and
low TEWI (total equivalent of warming impact)**

Advantage: TCO reduction – minimum maintenance costs

Extended maintenance intervals

- Best possible “running” parts
- Always optimum speed chosen – VSD driven
- No oil change required if oil quality will be tested (external)
- Nominal services (all 5000 hours) only “Visual check”
- Regular oil services every 25,000h
- “Major Service” (no overhaul) at 50,000h recommended




Advantage: TEWI reduction


- TEWI judges the consequences of a refrigeration plant
- Life span examination of leakages; recuperation and energy consumption

Ammonia chillers have low TEWI (kg CO₂ equivalent) due to

- Using natural refrigerant ammonia → GWP (global warming impact) = 0
- No refrigerant losses acceptable due to lowest possible detection level (≈3ppm)
- Low refrigerant charge compared to HFCs chiller (1MW Cooling Capacity Chiller: 130Kg NH₃ compared with 200Kg R134a)
- High efficiency leads to minimized energy costs / CO₂ equivalent

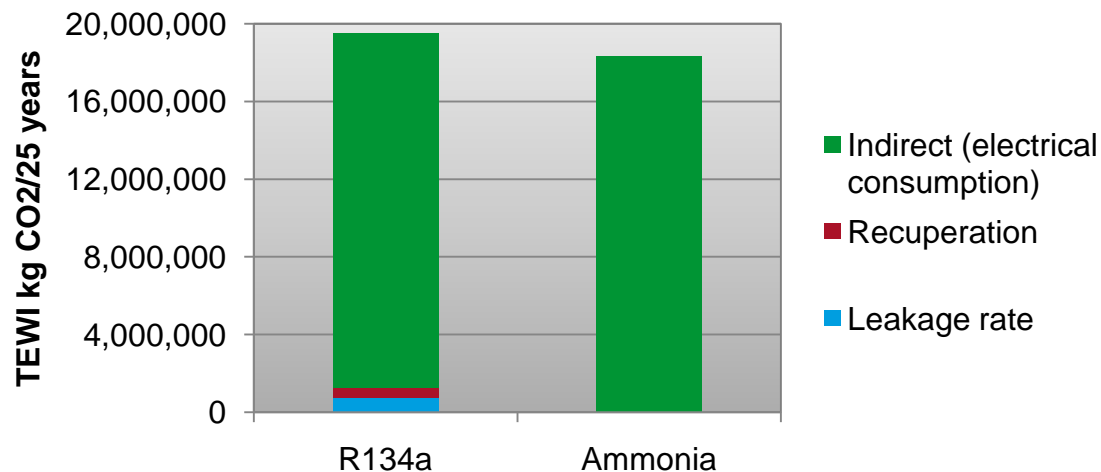

Advantage: Efficiency at part load and full load

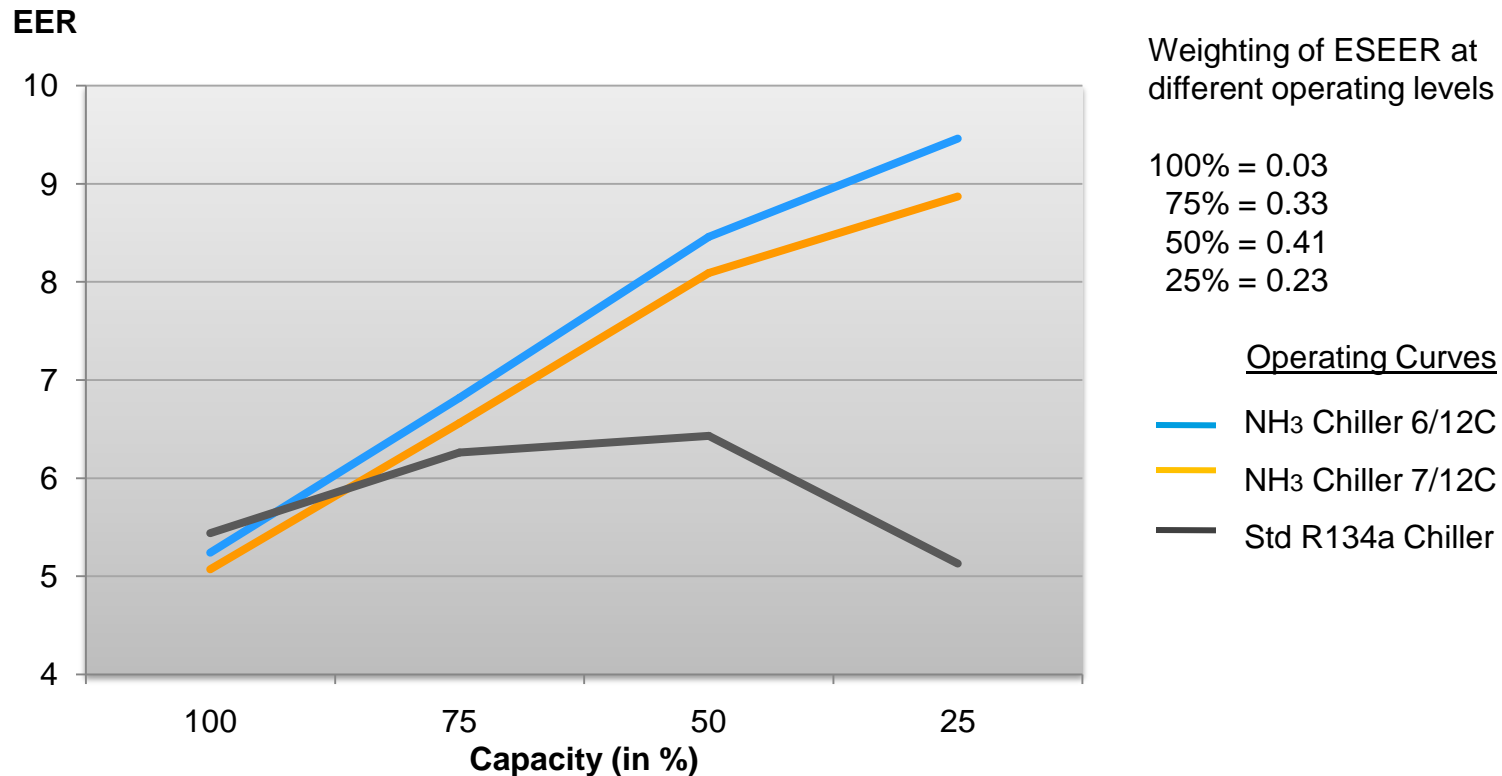

Ammonia Chillers achieve the highest ESEER values

Advantage: Door size – easy to install

Ammonia Chillers with door size for a standard door

- NH₃ Chiller - 1,1MW Cooling Capacity: 5.0 x 1.0 x 2.1 m (LxWxH)


Std R134a Chillers are far away door size

- Std Chiller 1 5.8 x 1.6 x 2.1m
- Std Chiller 2 5.0 x 2.0 x 2.3m
- Std Chiller 3 4.7 x 1.5 x 2.4 m



Ammonia R717

5 m²

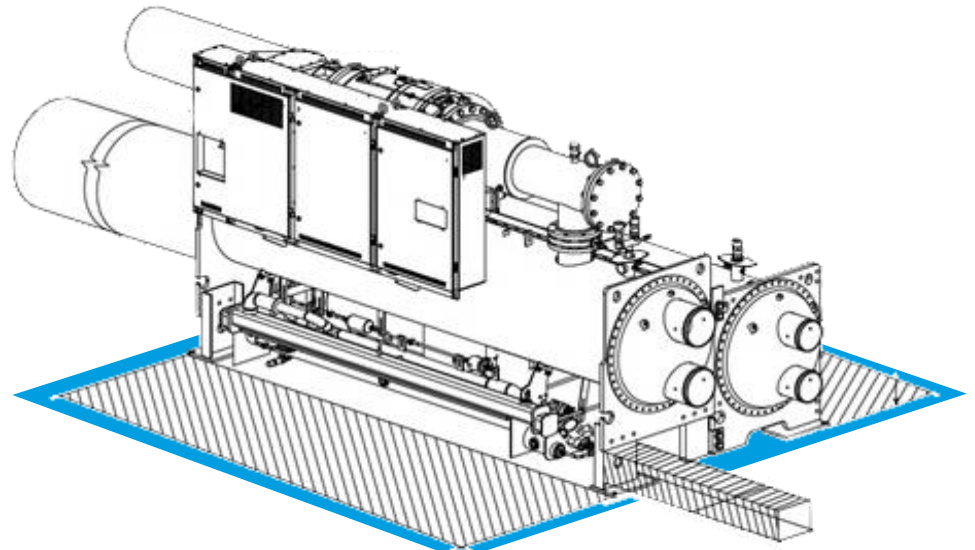

Commercial products

10 m² plus additional
service space

Ammonia Chiller range overview

Water Cooled Chillers
Capacity Range:
300KW – 5000KW



Air Cooled Chillers
Capacity Range:
100KW – 1250KW



Σας Ευχαριστώ!

Δίντσιος Κων/νος

Μηχανολόγος Μηχανικός MSc

Engineering Energy Systems
